




DoorBird
Technology meets Design.

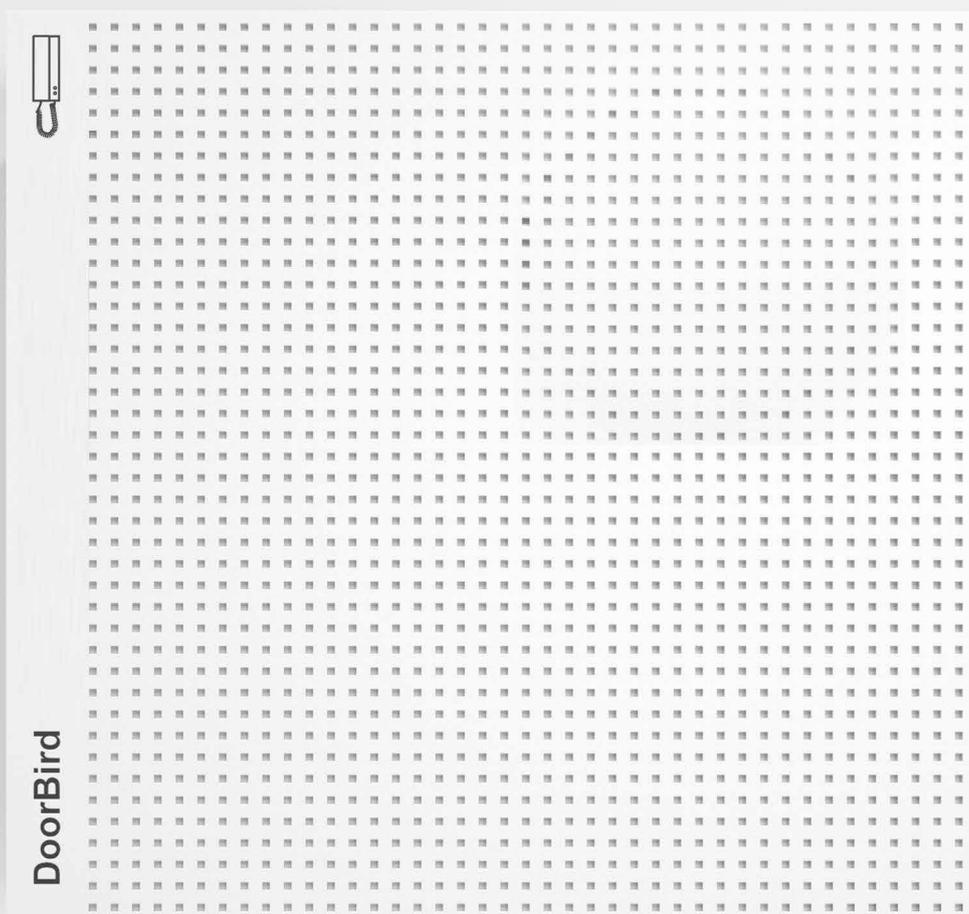

D301

DOOR INTERCOM
IP UPGRADE


Designed,
developed and
made in Germany

ANSWER YOUR DOOR ANYWHERE.

With DoorBird you never miss a visitor.

SMART REPLACES ANALOG

Imagine you are not at home and your kids locked themselves out. Or UPS wants to deliver a package. DoorBird's new IP Upgrade for existing door intercom systems provides a solution therefore: When the doorbell is ringing, you receive a push notification on your smartphone or tablet and can talk to the visitor. With DoorBird, you can be on the move and yet at home at the same time, even if a burglar pushes the doorbell to check if you are inside or absent. With DoorBird you never miss a visitor.

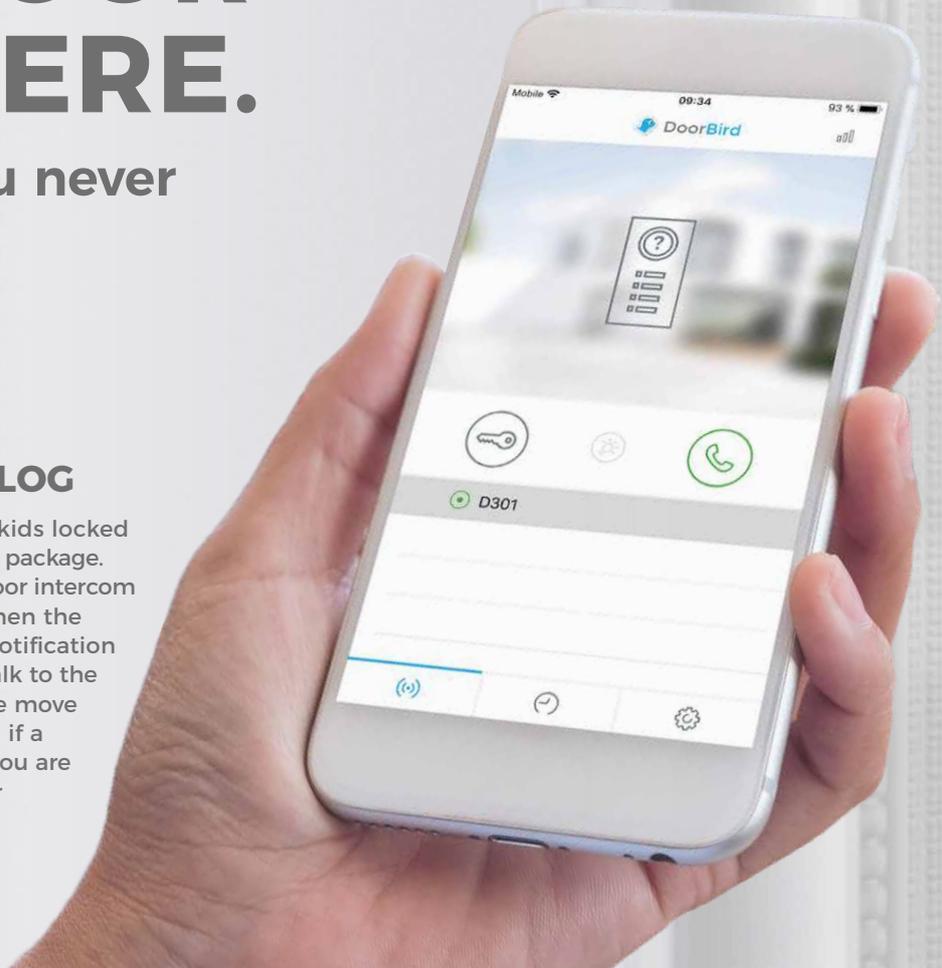

EASY INSTALLATION

The DoorBird D301 converts a conventional analog door intercom system into an IP door intercom system. To enable this, the D301 - a small white box - is simply connected to the existing indoor station via a cable. The functional scope of the indoor station is completely preserved. The D301 is then connected to the Internet via WiFi or, alternatively, via network cable and PoE. The configuration of the D301 is carried out comfortably via the DoorBird App, which is available free of charge for iOS and Android.



Receive packages at any time

Talk to the delivery person from anywhere in the world via smartphone and e.g. direct him to your neighbor or open the door via smartphone

SUPPORTED BRANDS

DoorBird D301A (Audio):

See: www.doorbird.com/d301

DoorBird D302A (Audio) and DoorBird D302AV (Audio + Video), under development:

- | | | |
|-----------|-----------|-------------|
| • Aiphone | • Bticino | • Comelit |
| • Commax | • Commend | • Elcom |
| • Feller | • Fermax | • Golmar |
| • Gira | • Merten | • René Koch |
| • Ritto | • Siedle | • SKS |
| • STR | • TCS | • Urmet |



Prevention of burglary

A DoorBird door intercom can prevent more burglaries than an alarm system



DoorBird
Technology meets Design.



Open API

Local interface for integration with third-party systems and SIP



Free Cloud history

Can be activated optionally for visitor history



Smart Home & ONVIF* compatible

Control4, Loxone, Crestron, Synology, QNAP, AVM FRITZ!fon, URC, RTI, ELAN, Fibaro, Bang & Olufsen and many more



Push notification and audio call

On smartphones and tablets (iOS, Android) or landline phones (SIP)



Easy connection to the network

Via WiFi or network cable (PoE)



Geofencing

Automatic door and gate opening upon returning home



Automatic door opener

For use in medical practices and business environments




Elegant and discreet design

No visible screws



Echo and Noise suppression (AEC, ANR)

For 2-way voice communication

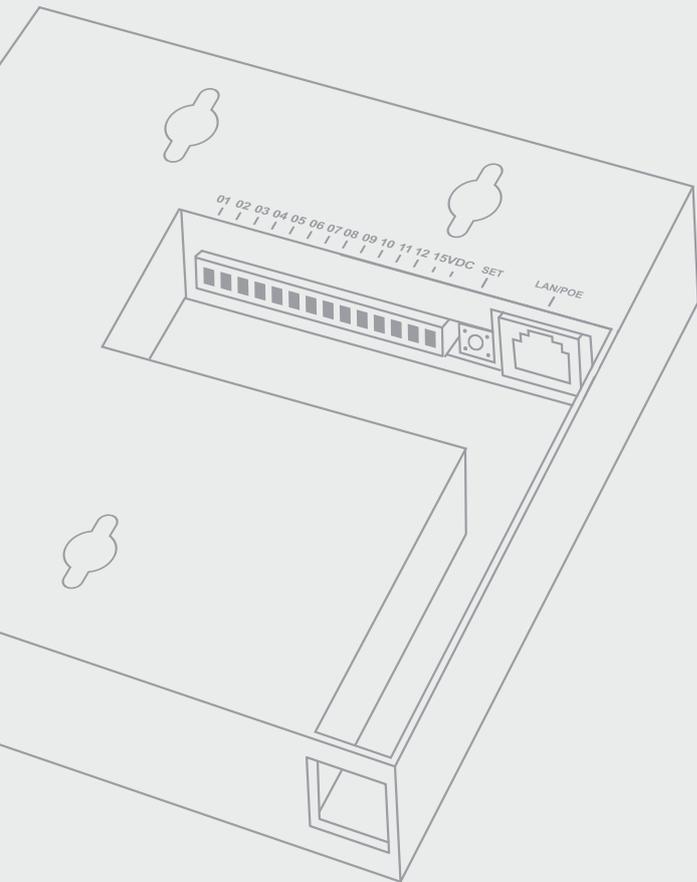

ADVANTAGES

- Excellent speech quality
- Door / gate opening via App
- Call tone differentiation for front door and storey call
- WiFi, Ethernet, PoE
- No ongoing costs, not even for the remote access
- Encryption according to bank standard
- Unlimited range (LAN, Internet)
- Automatic door opener
- Visitor history
- Geofencing
- Open API and ONVIF (only D302AV) compatible
- Integration possibilities for corporate customers, e.g.: Delivery services, home & elderly care
- Made in Germany

TECHNICAL SPECIFICATIONS

Dimensions	125 x 119 x 26 mm (H x W x D) 4,92 x 4,68 x 1,02 in (H x W x D)
Power supply	15 V DC or Power over Ethernet (PoE 802.3af Mode-A)
Operating conditions	0 to +55°C / 32 to 131°F Relative Humidity 10 % to 85 % (non condensing)
Connectors	<ul style="list-style-type: none"> • RJ45 for LAN/PoE • 15 V DC Eingang (+, -) • Inputs for bus and communication signals
Supported door intercoms	See: www.doorbird.com/d301
WiFi	2.4 GHz, 802.11 b/g/n, internal antenna
PoE	IEEE 802.3 af/at
Housing	Polycarbonate/ABS, UV-resistant
System requirements	<p>Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet</p> <p>Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fiber optic, no socks or Proxy server</p> <p>Network: 802.11 b/g/n 2.4 GHz or Ethernet Network, with DHCP</p>
Scope of delivery	<p>1 x D301A</p> <p>1 x Power supply unit (mains adaptor) with four country-specific adaptors (110 - 240 V AC to 15 V DC)</p> <p>1 x Small parts</p> <p>1 x Installation manual</p>
Approvals	CE, FCC, IC, RoHS, IP50
Weight	200 g
EAN	4260423860896